


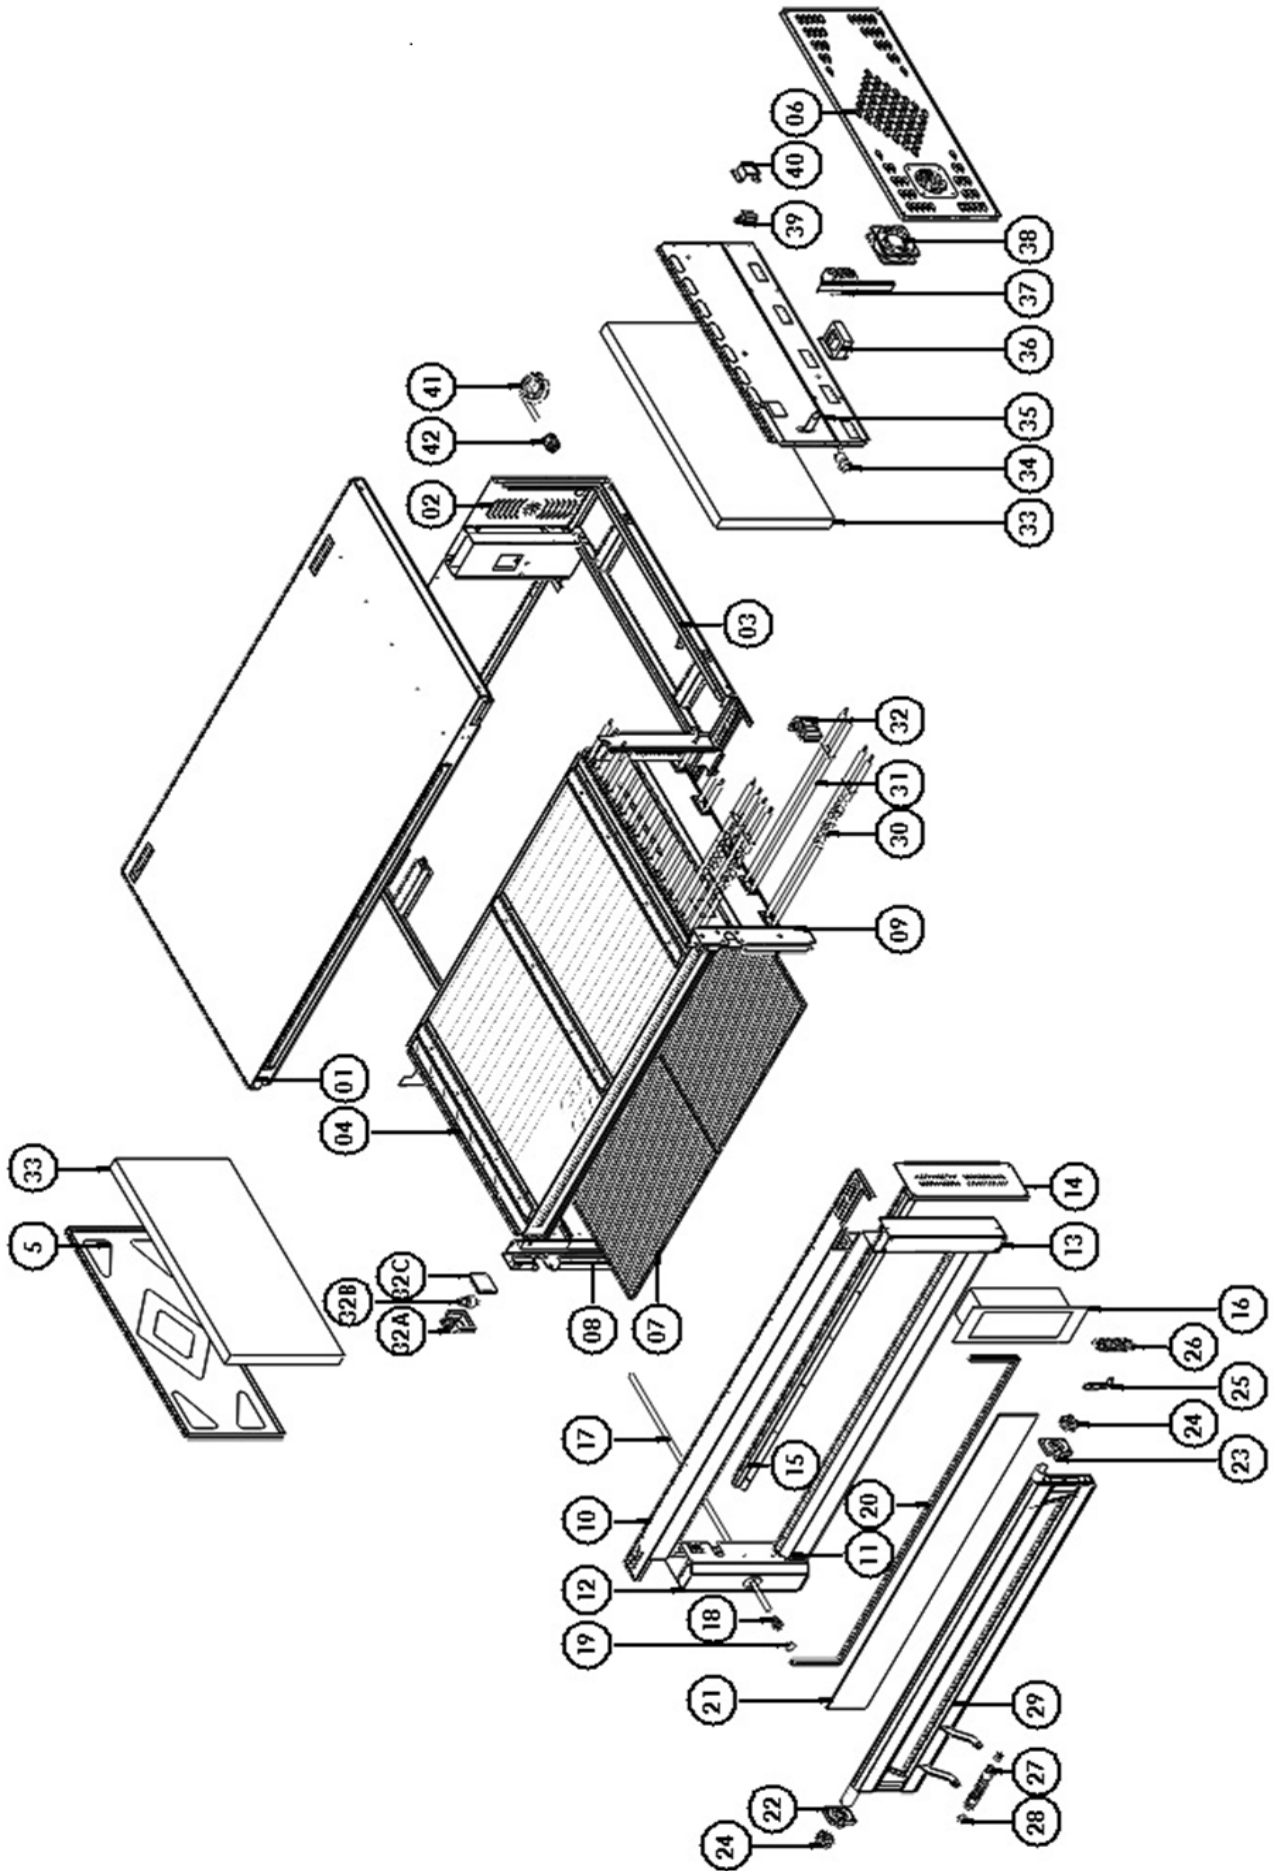


PB3M - 88		Dış Ölçüler / Outside Dim.	1262 x 1297 x 2177 mm.
		İç Ölçüler / Inside Dim.	3 x 840 x 840 x 140 mm.
		Pişirme Alanı / Baking Arena	3 x (2 x (80x40 cm.) , 4 x (40x40 cm.) , 4 x (Ø 40 cm.))
		Pişirme Taşı Ölçüleri / Baking Stone Dim.	3 x (2 x (820 x 410 x 14 mm.))
		Termostat Aralığı (°C) / Thermostat Interval (°C)	3 x (85 - 455 °C (1 ad. Bağımsız / 1 pcs. Independent))
		Aydınlatma / Illumination	3 x (2 ad. 25 W. / 2 pcs. 25 W.)
		Toplam Elektrik Gücü / Total Power (kW)	3 x (3 x 700 W. + 11 x 600 W. = 8700 W.)
		Besleme Gerilimi / Supply Voltage (V/A)	3 x (400 V 3F+N / 3 x 23 A.)
		Besleme Kablosu / Supply Cable	5 x 4 H07RN-F
		İç Tesisat Kabloları / Internal Cable	SIAF 2,5 mm²
		İzolasyon / Insulation	Taş Yünü / Rock Wool
		Ağırlık / Weight	546 kg.

NO.	AÇIKLAMA	DESCRIPTION	ÜRÜN NO. / ITEM NO	ADET / PCS.
1	GÖVDE ÜST	UPPER BODY	PB3M88-01	3
2	GÖVDE ARKA	REAR BODY	PB3M88-02	3
3	GÖVDE ALT	LOWER BODY	PB3M88-03	3
4	PİŞİRME KAZANI	BAKING CHAMBER	PB3M88-04	3
5	SOL YAN KAPAK	COVER LEFT SIDE	PB3M88-05	3
6	SAG YAN KAPAK	COVER RIGHT SIDE	PB3M88-06	3
7	PİŞİRME TAŞI	BAKING STONE	PB3M88-07	6
8	KAPAK MEKANİZMA DİREĞİ SOL	LEFT RID MECHANISM	PB3M88-08	3
9	KAPAK MEKANİZMA DİREĞİ SAG	RIGHT RID MECHANISM	PB3M88-09	3
10	ÖN ÜST PASLANMAZ	UPPER FRONT STAINLESS	PB3M88-10	3
11	ÖN ALT PASLANMAZ	LOWER FRONT STAINLESS	PB3M88-11	3
12	ÖN SAG PASLANMAZ	RIGHT FRONT STAINLESS	PB3M88-12	3
13	ÖN SOL PASLANMAZ	LEFT FRONT STAINLESS	PB3M88-13	3
14	PANEL YUVAŞI SOL PASLANMAZ	LEFT PANEL SLOT STAINLESS	PB3M88-14	3
15	TAŞ ÇİTASI	STONE LATH	PB3M88-15	3
16	KONTROL PANELİ	CONTROL PANEL	PB3M88-16	3
17	BACA HAREKET MİLİ	CHIMNEY MOTION SHAFT	PB3M88-17	3
18	BACA ALÜMİNYUMU	CHIMNEY ALUMINUM	PB3M88-18	3
19	BACA TUTAMAĞI	CHIMNEY HANDLE	PB3M88-19	3
20	KAPAK CAM FİTİLİ	COVER GASKET	PB3M88-20	3
21	GÖZETLEME CAMI	SIGHT GLASS	PB3M88-21	3
22	SOL RULMAN YATAĞI	LEFT ROLLER BEARING	PB3M88-22	3
23	SAG RULMAN YATAĞI	RIGHT ROLLER BEARING	PB3M88-23	3
24	RULMAN	ROLLER	PB3M88-24	6
25	KAPAK YAY TUTUCU	SPRING HOLDER COVER	PB3M88-25	3
26	KAPAK YAYI	COVER SPRING	PB3M88-26	3
27	KAPAK TUTAMAĞI	COVER HANDLE	PB3M88-27	3
28	KAPAK TUTAMAĞI SABİTLEYİCİ CIVATA	COVER HANDLE FIXING SCREW	PB3M88-28	6
29	ÖN KAPAK	FRONT COVER	PB3M88-29	3
30	ÖN REZİSTANS	FRONT RESISTANCE	PB3M88-30	9
31	ARKA REZİSTANS	BACK RESISTANCE	PB3M88-31	33
32	AYDINLATMA LAMBASI	LIGHTING LAMP	PB3M88-32	6
32A	DUY	SOCKET	PB3M88-32A	6
32B	AMPÜL	BULB	PB3M88-32B	6
32C	LAMBA CAMI	LAMP GLASS	PB3M88-32C	6
33	İZOLASYON	INSULATION	PB3M88-33	3
34	SESLİ UYARICI	BUZZER	PB3M88-34	3
35	ELEKTRİK MONTAJ PANOSU	ELECTRICAL ASSEMBLY PANEL	PB3M88-35	3
36	KONTROL PANELİ TRAFOSU	CONTROL PANEL TRANSFORMER	PB3M88-36	3
37	KONTAKTÖR GRUBU	CONTACTOR GROUP	PB3M88-37	3
38	HAVALANDIRMA FANI	VENTILATING FAN	PB3M88-38	3
39	EMNİYET TERMOSTATI	SAFETY THERMOSTAT	PB3M88-39	3
40	EMNİYET TERMOSTATI KUTUSU	SAFETY THERMOSTAT BOX	PB3M88-40	3
41	BESLEME KABLOSU	FEEDING CABLE	PB3M88-41	3
42	RAKOR	FEEDING CABLE SOCKET	PB3M88-42	3





	ÜRÜN ADI / PRODUCT	TARİH / DATE	DETAY RESİM LİSTESİ - A DETAIL PICTURE LIST - A
	PB3M - 88	29/08/2018	SAYFA NO: 2 / 6 PAGE NO.: 2 / 6

PB3M - 88	Dış Ölçüler / Outside Dim.	1262 x 1037 x 420 mm.
	Kapasite / Capacity	(12 ad. / pcs.) x 40 x 60 Tava / Tray
	Termostat Aralığı (°C) / Thermostat Interval (°C)	30 - 90 °C
	Aydınlatma / Illumination	1 ad. 25 W. / 1 pcs. 25 W.
	Toplam Elektrik Gücü / Total Power (kW)	3 x 1000 W. = 3000 W.
	Besleme Gerilimi / Supply Voltage (V/A)	220 V F+N / 14 A.
	Besleme Kablosu / Supply Cable	3 x 1,5 H07RN-F
	İç Tesisat Kabloları / Internal Cable	SIAF 2,5 mm²
	Ağırlık / Weight	100 Kg.

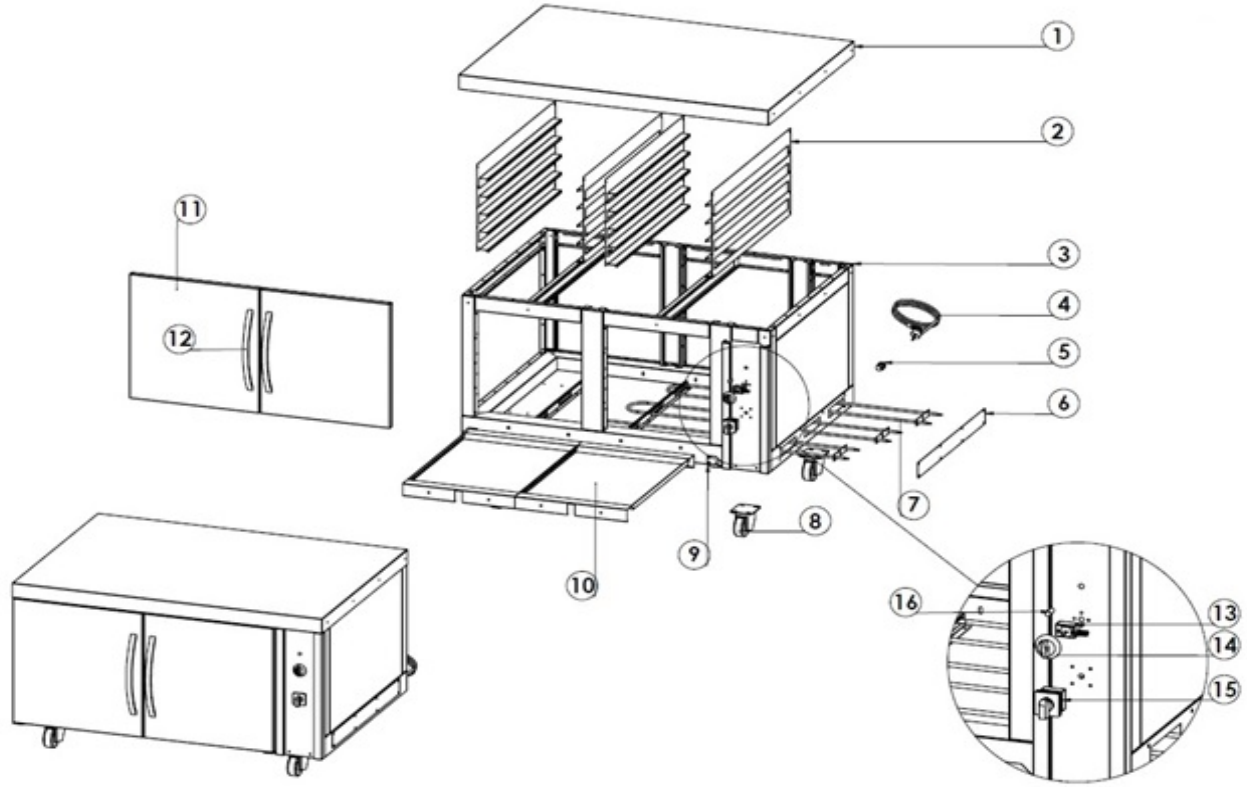


NO.	AÇIKLAMA	DESCRIPTION	ÜRÜN NO. / ITEM NO	ADET / PCS.
1	ÜST TABLA	TOP TABLE	PB3M88-101	1
2	TEPSİ RAFI	TRAY SHELF	PB3M88-102	4
3	GÖVDE	MAIN BODY	PB3M88-103	1
4	BESLEME KABLOSU	FEEDING CABLE	PB3M88-104	1
5	RAKOR	FEEDING CABLE SOCKET	PB3M88-105	1
6	REZİSTANS KAPAĞI	RESISTANCE COVER	PB3M88-106	1
7	REZİSTANS	RESISTANCE	PB3M88-107	3
8	TEKERLEK	WHEEL	PB3M88-108	4
9	MENTEŞE	HINGE	PB3M88-109	2
10	ALT TAVA	LOWER PAN	PB3M88-110	2
11	KAPAK	COVER	PB3M88-111	2
12	TUTMA KULPU	HOLD HANDLE	PB3M88-112	2
13	TERMOSTAT	THERMOSTAT	PB3M88-113	1
14	TERMOSTAT DÜĞMESİ	THERMOSTAT BUTTON	PB3M88-114	1
15	ŞALTER DÜĞMESİ	POWER SWITCH BUTTON	PB3M88-115	1
16	TERMOSTAT LAMBASI	THERMOSTAT LAMP	PB3M88-116	1

	ÜRÜN ADI / PRODUCT	TARİH / DATE	DETAY RESİM LİSTESİ - B DETAIL PICTURE LIST - B
	PB3M - 88	29/08/2018	SAYFA NO: 3 / 6 PAGE NO.: 3 / 6

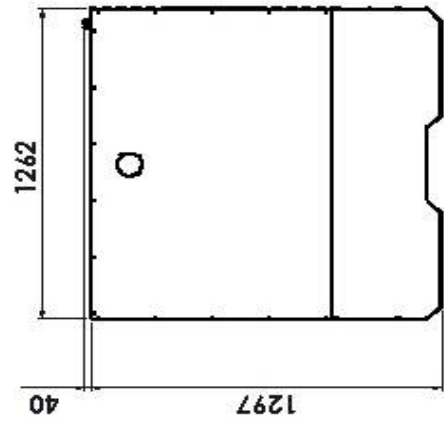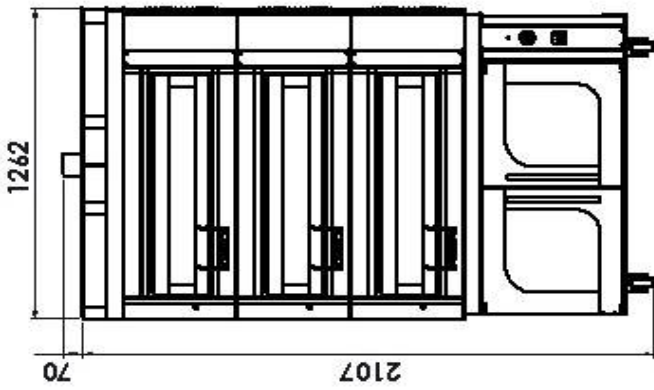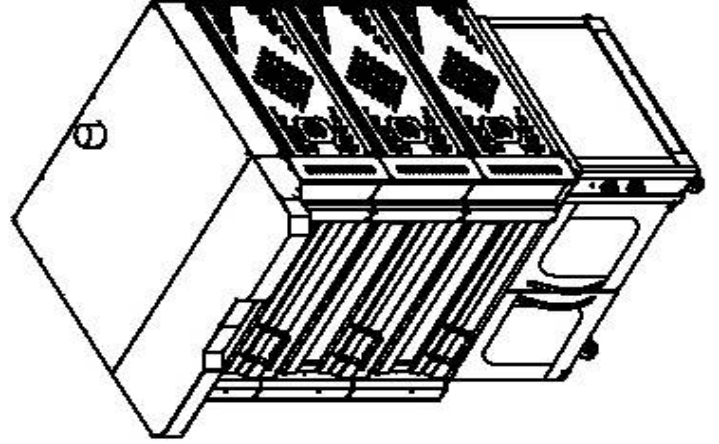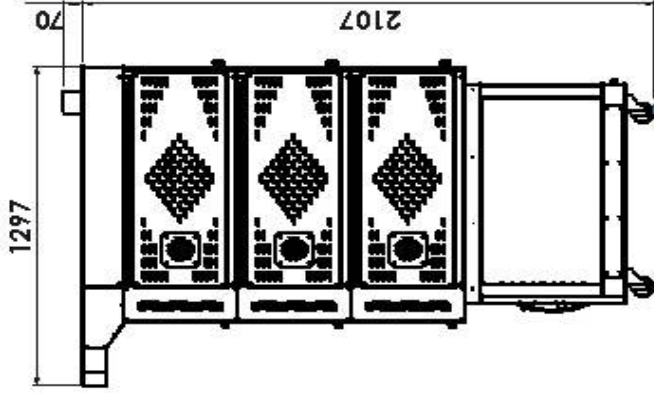


PBF 88 PASTA BÖREK FIRINI - ELEKTRİK ŞEMASI
PBF 88 BAKERY & PASTRY OVENS - ELECTRICAL DIAGRAM

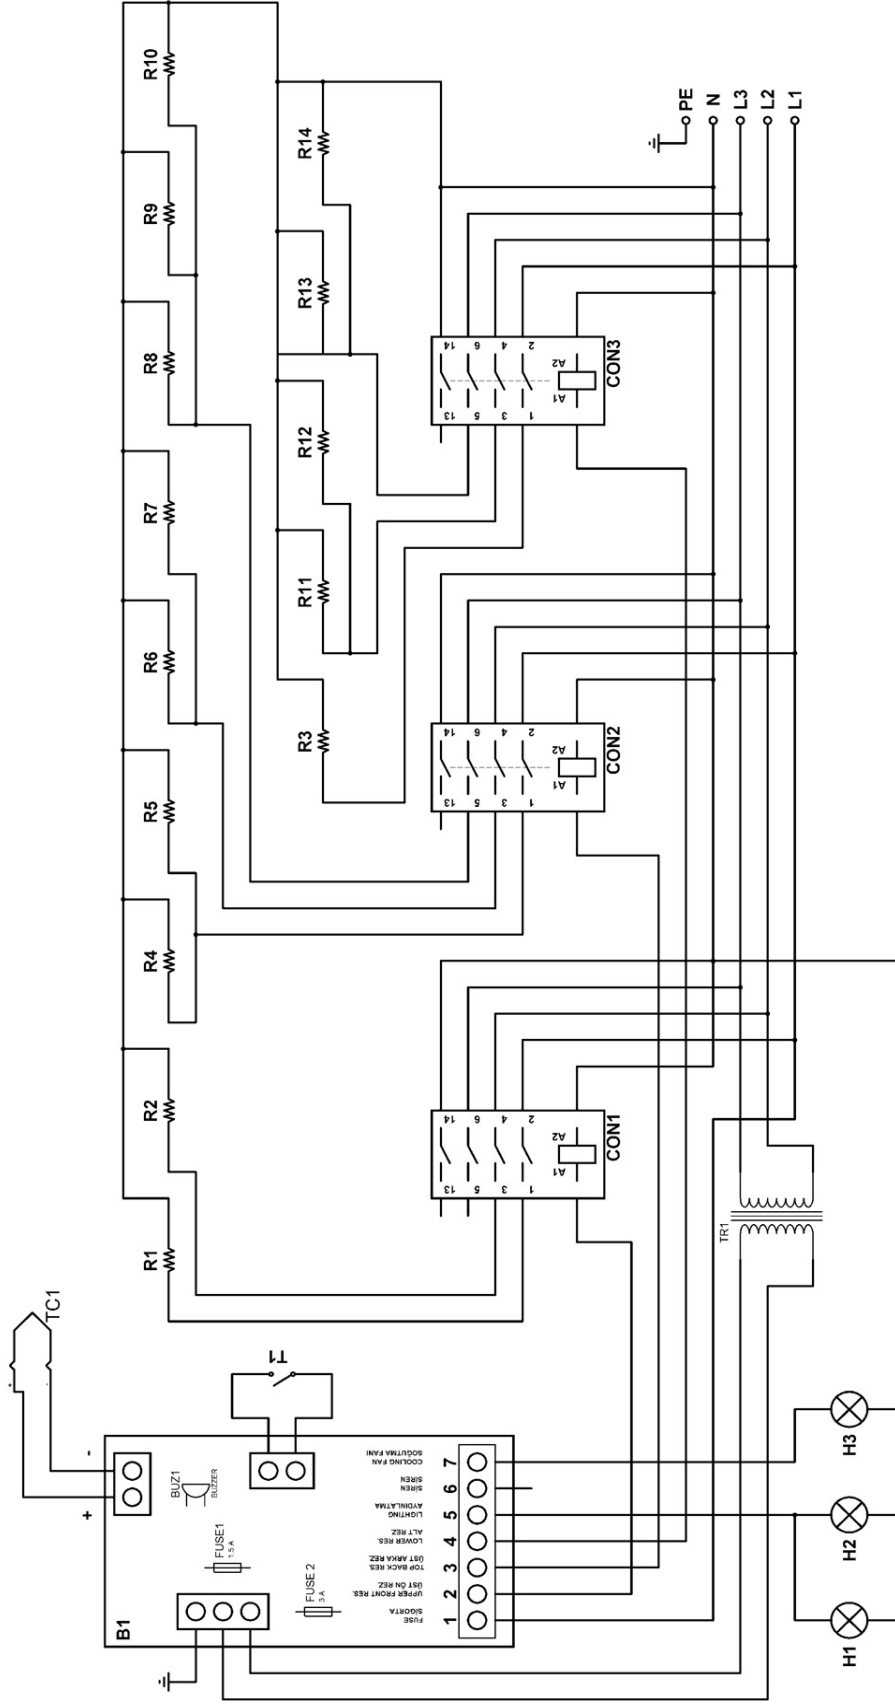

NO	AÇIKLAMA	NO	AÇIKLAMA	NO	AÇIKLAMA	NO	AÇIKLAMA
R1 - R2 - R3	Rezistans / Resistance (700 W)	CON 1 - CON 2 - CON 3	Kontakör / Contactor	T1	Termostat / Thermostat (85 - 455 °C)	TR1	Trafo 380 V - 24 V . 1 A Transformer 380 V - 24 V . 1A
NO	AÇIKLAMA	NO	AÇIKLAMA	NO	AÇIKLAMA	NO	AÇIKLAMA
R4 ... R14	Rezistans / Resistance (600 W)	H1 - H2	İç Aydınlatma Lambası Interior Lighting Lamp (25W)	H3	Soğutma Fani Cooling Fan	TC 1	Termokupl - J Tipi Thermocouple - Type J
NO	AÇIKLAMA						
B1	Dijital Kontrol Kartı Digital Control Board						

PB3M 88 MAYALAMA KABİNİ - ELEKTRİK ŞEMASI
PB3M 88 FERMENTATION CABINET - ELECTRICAL CIRCUIT DIAGRAM

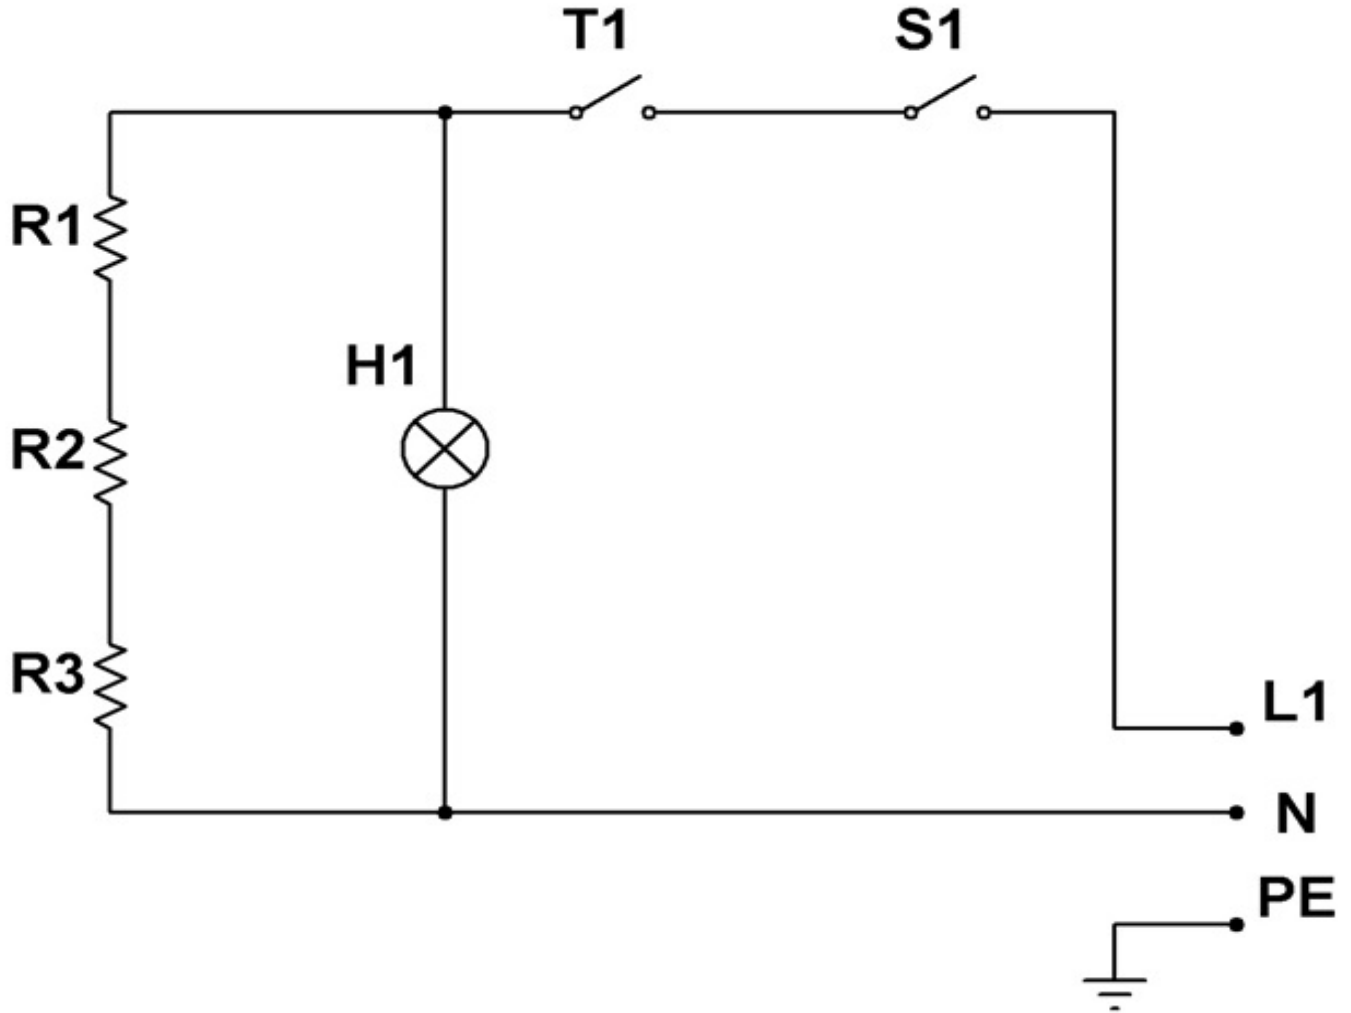

NO	AÇIKLAMA / DESCRIPTION	NO	AÇIKLAMA / DESCRIPTION
R1 ... R3	Rezistans / Resistance (1000 W)	S1	Şalter / Power Switch
T1	Termostat / Thermostat (30 - 90 °C)	H1	Termostat Kontrol Lambası Thermostat Control Lamps